



THE LEGENDARY H1

TRUE, THE H1 IS NOT FOR EVERYONE.


But then again, many of its capabilities aren't for everyone either. Like climbing a 22 inch vertical wall, navigating a 60% grade, traversing a 40% side slope, or fording through 30 inches of water.

But if you were to drive one, you'd soon realize that its 6.5L V8 turbo diesel engine, highly advanced 4WD, traction control and suspension systems, and hardened aluminum body can take you places almost no other vehicle can. And we don't just mean geographically.

Sometimes you find yourself in the middle of nowhere. And sometimes in the middle of nowhere you find yourself.





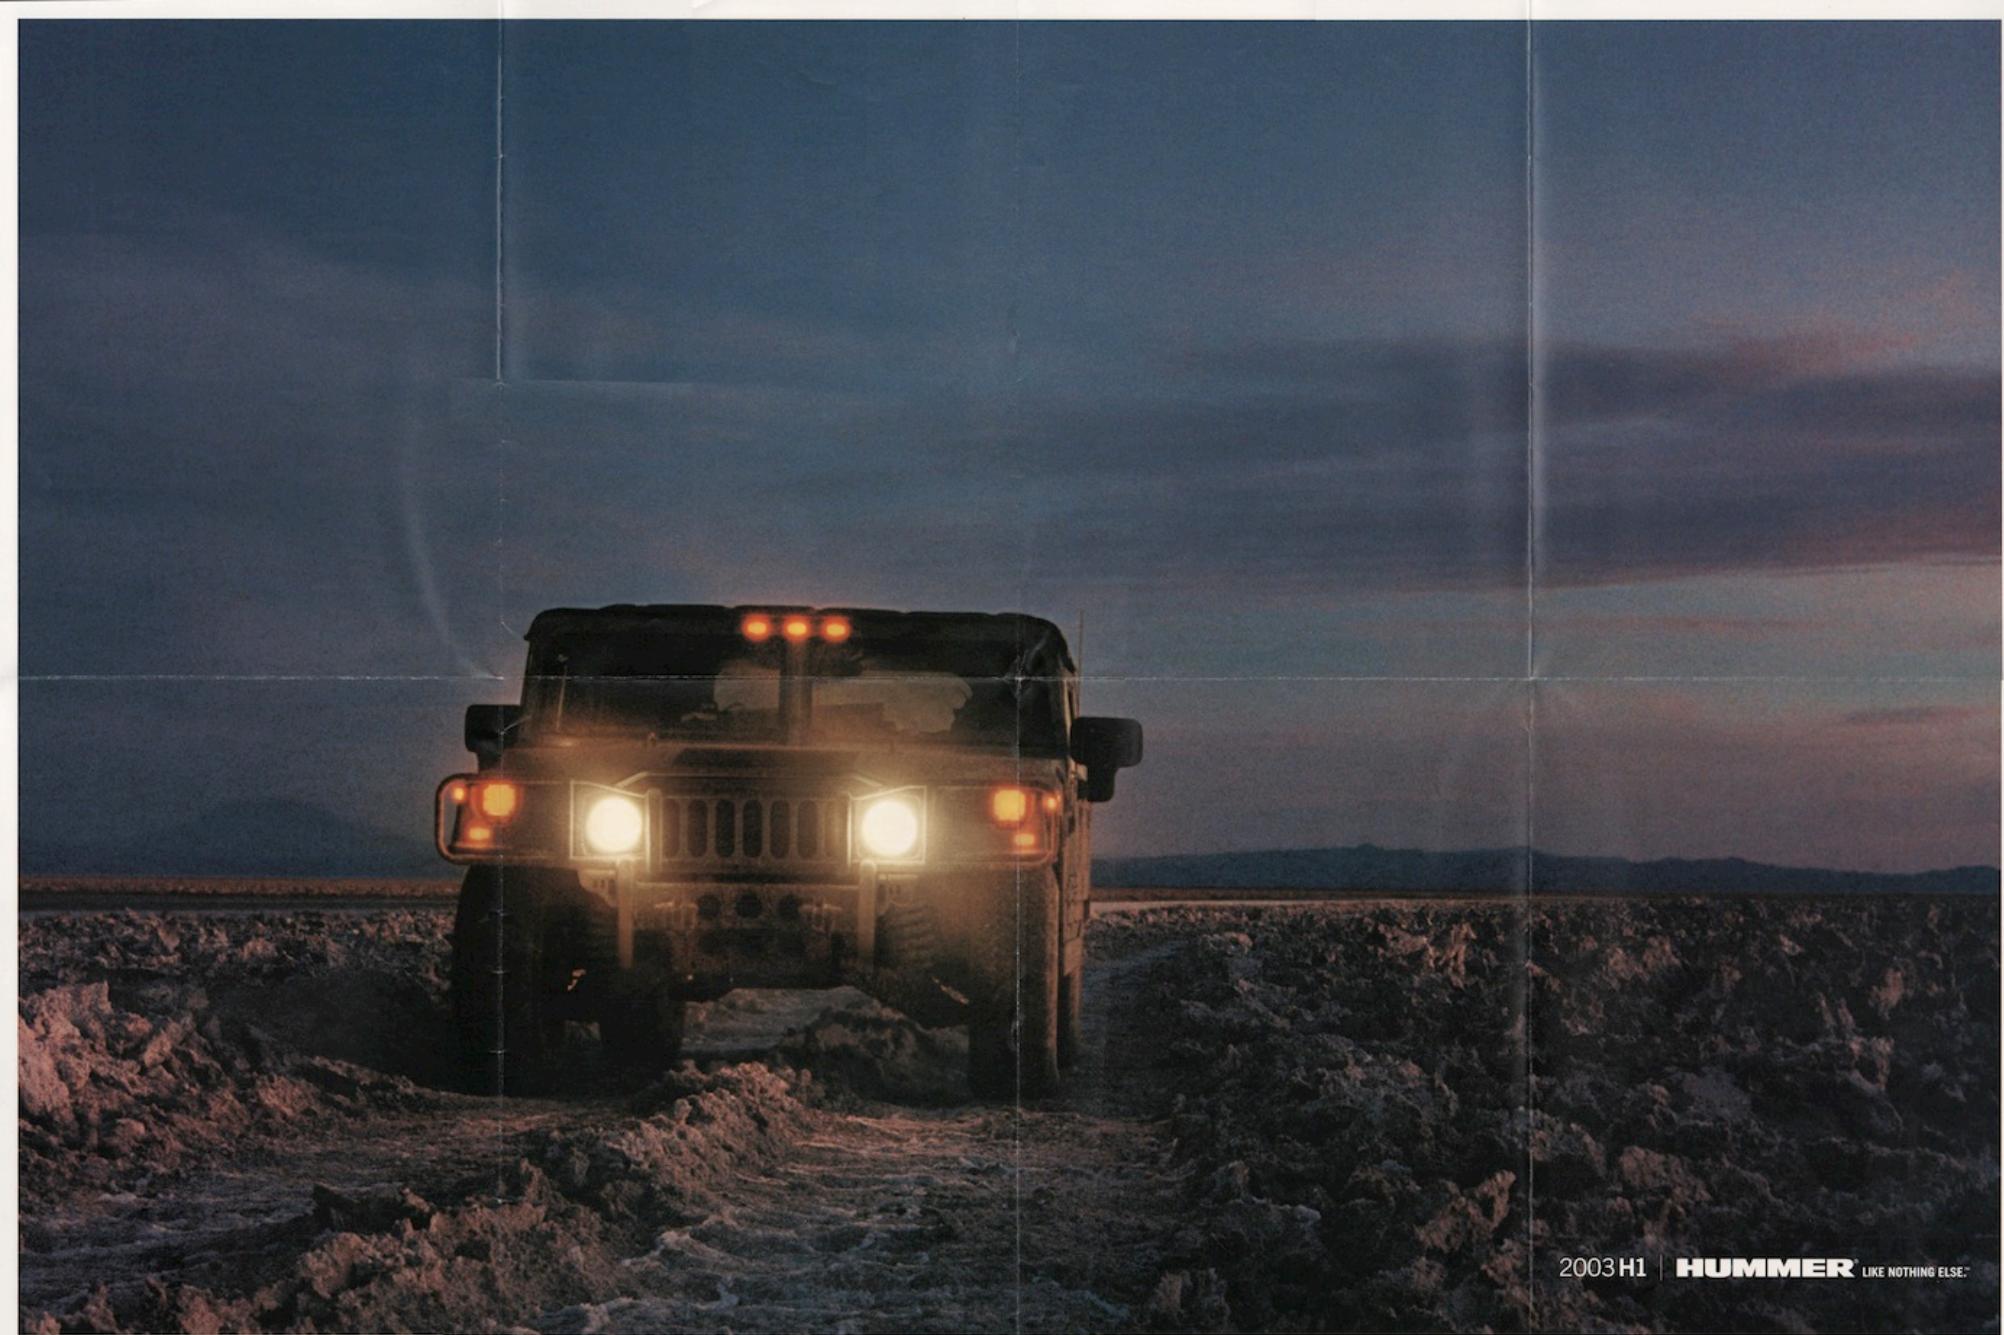

2003 H1 | **HUMMER**™ LIKE NOTHING ELSE.



4-DOOR WAGON



4-DOOR OPEN TOP

COMPONENTS & FEATURES

ENGINE V8, 6.5L Turbocharged diesel, electronically-controlled
HORSEPOWER 195 hp @ 3400 rpm
TORQUE 430 lb-ft. @ 1800 rpm
TRANSMISSION 4L80-E 4-speed automatic
DRIVETRAIN Full-time 4WD with TorqTrac 4[®] (TT4) traction system
GEARED HUBS Gear ratio of 1.92:1
DIFFERENTIAL Zexel Torsen[®]III torque biasing differential
STEERING Power-assisted
BRAKES Hydroboost 4-wheel in-board mounted power disc brakes and Meritor-WABCO 4-channel ABS
SUSPENSION Independent double A frame with open-end coil springs and hydraulic shock absorbers
FRAME Steel box section with 5 cross members

SPECIFICATIONS & PERFORMANCE DATA

LENGTH 184.5 in. (NOTE 1)
HEIGHT
 4-Door Wagon: 75 in.
 4-Door Open Top: 77 in.
TRACK WIDTH 71.6 in.
WHEELBASE 130 in.
GROUND CLEARANCE 16 in.
APPROACH ANGLE 72[°]
DEPARTURE ANGLE 37.5[°]
MAXIMUM TOWED LOAD (NOTE 2)
 4-Door Wagon: 7,409 lbs.
 4-Door Open Top: 7,867 lbs.
RUNFLAT CAPABILITY 20 miles @ 30 mph (NOTE 3)
TURNING RADIUS 25.5 ft.
WATER FORDING DEPTH 30 in.
FUEL CAPACITY 25 gal. tank plus 17 gal. auxiliary tank

STANDARD INTERIOR EQUIPMENT

Cloud Gray cloth seats
 Remote keyless entry
 Power windows (express down for driver)
 Monsoon[®] audio system with 12-disc CD player/changer and cassette
 Air conditioning with auxiliary rear unit
 Cruise control
 Air inflation line with quick connects
 E-Z Kool[®] glass (windshield, passenger/driver windows)
 Privacy glass (rear windows only/wagon only)
 Heated windshield
 Central Tire Inflation System (CTIS) controls and in-dash tire pressure gauges

STANDARD EXTERIOR EQUIPMENT

6061 T6 hardened aircraft aluminum body
 Composite hood
 Heavy duty steel bumper towing shackles
 3/16 in. rocker panel protection constructed from T6 aluminum
 Tonneau cover available in Black or Tan (4-Door Open Top)
 Vertical rear doors (4-Door Wagon)
 Heavy duty straight brush guard
 Driveline protection
 Trailer towing unit with wiring harness
 Heated power mirrors
 Halogen headlights

WHEELS & TIRES

17 in. 1-piece cast aluminum wheels
 37 x 12.5R-17 load range "E" Goodyear Wrangler GSA radial
 Central Tire Inflation System (CTIS) with on-board air compressor
 Tire bead retaining system
 Runflat tire system (NOTE 3)

OPTIONAL EQUIPMENT

Cloud Gray heated leather-trimmed front seats
 Eaton[®] Electronic ELocker[™] limited-slip rear differential
 17 in. 2-piece forged aluminum wheels with dual beadlocks and runflats featuring a fully concealed air delivery system to support CTIS
 37 x 12.5R-17 load range "E" Goodyear Wrangler MT/R tire with DuraWall[®] puncture resistance technology
 12,000 lb. winch

EXTERIOR COLORS



BLACK DIAMOND METALLIC



BLACK



BRIGHT WHITE



COMPETITION YELLOW



OCEAN BLUE METALLIC



FIREHOUSE RED



METALLIC PEWTER



SUMMIT SILVER



WOODLAND GREEN

PLEASE CALL 1.800.REAL.4WD OR VISIT OUR WEB SITE AT WWW.HUMMER.COM

HUMMER[®] LIKE NOTHING ELSE.[™]

©General Motors Corporation, 2003. All rights reserved. LIKE NOTHING ELSE[®] is a trademark of General Motors Corporation. HUMMER and the vehicle's grille are registered trademarks of General Motors Corporation. GM reserves the right to make changes, at any time and without notice, in prices, colors, materials, equipment, specifications, models and availability. Details and specifications may vary according to local regulations and conditions. Consult your local HUMMER dealer for availability of accessories and current specifications. All vehicles are built to GM's standard weight. Weight-carrying hitch: Increase by 5 in. APPROACH ANGLE: Decrease by 25[°]. NOTE 2: Maximum towing capacity will vary based on vehicle loading. Gross Combination Weight (GCW) of vehicle and trailer cannot exceed 15,300 lbs. for highway use only. A weight-carrying hitch gives your vehicle the capability to tow a maximum weight of 7,500 lbs. A weight-distributing hitch with spring bars may give your vehicle the capability to tow a maximum weight of up to 7,867 lbs., depending on model and payload. These are not necessarily weights the vehicle can tow. For more information, contact your GM dealer or visit WWW.GM.COM for detailed information. NOTE 3: The maximum towable weight your vehicle can tow off-road, no matter what type of hitch is being used, is 5,000 lbs. NOTE 3: For emergency use only, a "get home" capability is available. See your GM dealer for details. ADDITIONAL NOTES: TorqTrac[®] (TT4) is a registered trademark of AM General Corporation. E-Z Kool[®] is a registered trademark of Zexel Torsen, Inc. Monsoon is a registered trademark of EASTTECH Corp. E-Z Kool is a trademark of Pilkington Co. Durwall is a registered trademark of Goodyear. Eaton is a registered trademark of Eaton Corp. ELocker is a trademark of Eaton Corp.