




WWW.**HUMMER**.COM/2000



// MAGELLAN. LEWIS AND CLARK. MARCO POLO. THEY'RE LOOKING DOWN,
THINKING YOU'RE THE ONE IN HEAVEN

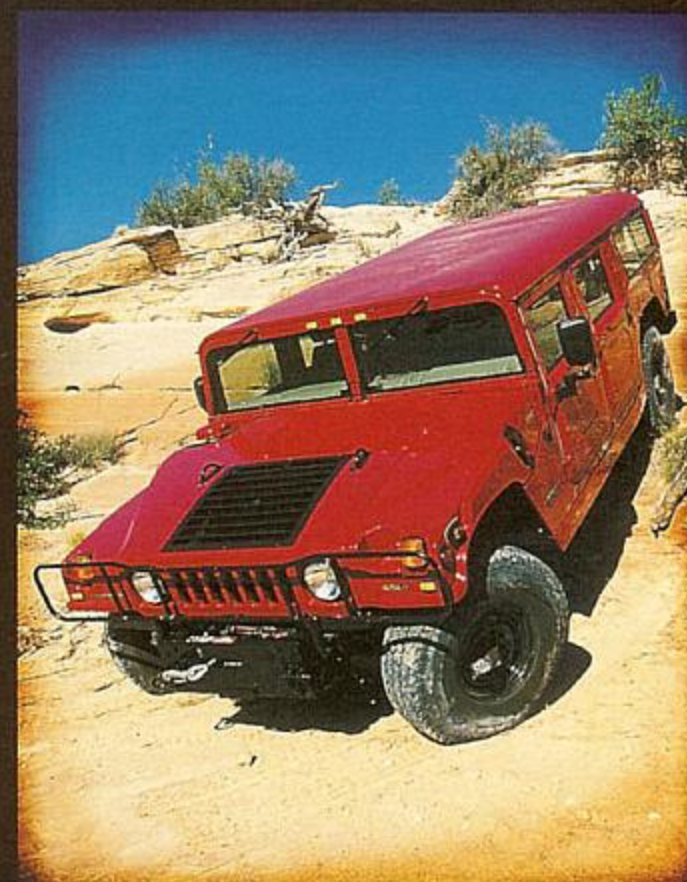

// SPECIFICATIONS AND PERFORMANCE DATA

	2-Door Hard Top		4-Door Hard Top		4-Door Open Top		4-Door Wagon		4-Door* Slant Back	
	Standard	Metric	Standard	Metric	Standard	Metric	Standard	Metric	Standard	Metric
Curb Weight (Note 1):										
10,300-/ 10,800-lb. GVWR	6,564 lbs.	2,977 kg	6,964 lbs.	3,159 kg	6,814 lbs.	3,091 kg	7,154 lbs.	3,245 kg	7,090 lbs.	3,216 kg
Payload (Notes 1 & 2):										
10,300-lb. GVWR	3,736 lbs.	1,695 kg	3,336 lbs.	1,513 kg	3,486 lbs.	1,581 kg	3,146 lbs.	1,427 kg	3,210 lbs.	1,456 kg
10,800-lb. GVWR	4,300 lbs.	1,950 kg	3,900 lbs.	1,769 kg	NA	NA	3,710 lbs.	1,683 kg	NA	NA
Gross Axle Weight Rating:										
Front: 10,300-/ 10,800-lb. GVWR	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg
Rear: 10,300-/ 10,800-lb. GVWR	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg
Maximum Towed Load (Note 3):										
10,300-/ 10,800-lb. GVWR	8,236 lbs.	3,736 kg	7,836 lbs.	3,554 kg	7,986 lbs.	3,622 kg	7,646 lbs.	3,468 kg	7,710 lbs.	3,497 kg
Length (Note 1):	184.5 in.	4,686 mm	184.5 in.	4,686 mm	184.5 in.	4,686 mm	184.5 in.	4,686 mm	184.5 in.	4,686 mm
Maximum Height:	75 in.	1,905 mm	75 in.	1,905 mm	77 in.	1,956 mm	75 in.	1,905 mm	75 in.	1,905 mm
Width (Without Mirror):	86.5 in.	2,197 mm	86.5 in.	2,197 mm	86.5 in.	2,197 mm	86.5 in.	2,197 mm	86.5 in.	2,197 mm
Wheelbase:	130 in.	3,302 mm	130 in.	3,302 mm	130 in.	3,302 mm	130 in.	3,302 mm	130 in.	3,302 mm
Ground Clearance:	16 in.	406 mm	16 in.	406 mm	16 in.	406 mm	16 in.	406 mm	16 in.	406 mm
Track Width:	71.6 in.	1,819 mm	71.6 in.	1,819 mm	71.6 in.	1,819 mm	71.6 in.	1,819 mm	71.6 in.	1,819 mm
Grade Capability:	60%	60%	60%	60%	60%	60%	60%	60%	60%	60%
Side-Slope Capability:	40%	40%	40%	40%	40%	40%	40%	40%	40%	40%
Approach Angle Without Winch:	72°	72°	72°	72°	72°	72°	72°	72°	72°	72°
Approach Angle With Winch:	47°	47°	47°	47°	47°	47°	47°	47°	47°	47°
Departure Angle:	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°
Runflat Capability (Note 4):										
(At 30 mph)	20 miles	32.2 km	20 miles	32.2 km	20 miles	32.2 km	20 miles	32.2 km	20 miles	32.2 km
Turning Radius:	26.5 ft.	8.1 m	26.5 ft.	8.1 m	26.5 ft.	8.1 m	26.5 ft.	8.1 m	26.5 ft.	8.1 m

* Available 1st Quarter, 2000

Notes: 1) The data on this page applies to models without winch and optional accessories. Models with winch are impacted as follows: Payload: Decrease by 137 lbs. (62 kg); Curb Weight: Increase by 137 lbs. (62 kg); Length: Increase by 6 in. (152.4 mm). 2) Payload includes passengers, optional equipment and trailer tongue weight. 3) Gross Combination Weight (GCW) of vehicle and trailer cannot exceed 14,800 lbs. (6,713 kg) for highway use only. A weight-carrying hitch gives your vehicle the capability to tow a maximum weight of 5,000 lbs. (2,268 kg). A weight-distributing hitch with spring bars gives your vehicle the

capability to tow a maximum weight of up to 8,300 lbs. (3,765 kg). These are not necessarily weights the vehicle will tow at sustained highway speeds or varying altitudes. NOTE: The maximum allowable weight your vehicle can tow off-road, no matter what type of hitch is being used, is 5,000 lbs. (2,268 kg). 4) Optional, for emergency use only, a "get home" capability that will cause tire damage. Consult your local Hummer dealer for availability of accessories and current specifications. All specifications are based on latest information available at time of printing. Pictured vehicles may vary from actual production

models. Manufacturer reserves the right to change prices, colors, materials, equipment and specifications at any time and without prior notice. Details and specifications may vary according to local regulations and conditions. Some models may not be available at all times in all markets. See your North American dealer for 3-year/36,000-mile warranty details. Copyright AM General Corp., 1999. HUMMER®, HUMVEE®, TorqTrac 4™ (TT4/ABS), Hummer Genuine™ and the vehicle's grille design are registered trademarks of AM General Corporation.

// COMPONENTS AND FEATURES

Turbo Diesel Engine :

Type : V8, 6.5L Diesel Turbocharged, Electronically Controlled
Horsepower : (@ 3,400 rpm): 195 hp (145 kW)
Torque : (@ 1,800 rpm): 430 lb.-ft. (583 Nm)
Governor Type : Electronic
Displacement : 396 cu. in. (6.5L)
Bore and Stroke : 4.06 x 3.82 in. (10.3 x 9.7 cm)
Compression Ratio : 20.2:1

Maximum Speed : 83 mph (134 kph)

Typical Accel. : (0 to 60 mph) 18.0 sec.

Fording Depth : 30 in. (76.2 cm)

Fuel Capacity : 25 gal. (95L). Plus 17 gal. (64L) res.

Transmission : 4L80-E 4-speed automatic

Gear Ratios : 1st - 2.48:1, 2nd - 1.48:1, 3rd - 1.00:1, 4th - 0.75:1, Reverse - 2.08:1, Torque Converter Ratio - 2.2:1

Transfer Case : New Venture Gear Model 242

Gear Ratios : Low 2.72:1, High 1:1

Axles : Hypoid with a ratio of 2.56:1. Continuous torque rating is 1,424 lb.-ft.

Geared Hubs : Gear Ratio - 1.92:1

Frame : Steel Box section with five cross members

Electrical : 12-Volt 124-Amp Alternator

Steering : Power assisted with a variable ratio of 13/16:1

Differential : Zexel Torsen® II torque biasing differential

Brakes : Hydraulic actuated, 4-wheel inboard mounted Meritor-WABCO ABS power disc brakes with translucent reservoir and level sensor. Rotors are 10.5 in. (266 mm) in diameter with an effective area of 17.4 sq. in. (112 sq. cm) each. Parking brake manually activates rear service brakes.

Suspension : Independent double A-frame with open-end coil springs and hydraulic shock absorbers

Tires : 37 x 12.50R-16.5 LT load range "D" Goodyear Wrangler MT radial



4-Door Open Top



2-Door Hard Top



4-Door Hard Top



4-Door Wagon



4-Door Slant Back

// STANDARD EQUIPMENT

- 4-Speed Automatic Transmission
- 4-Wheel ABS Power Disc Brakes
- Translucent Brake Fluid Reservoir with Level Sensor
- Tire Beadlock System
- Auxiliary Fuel Tank
- Tachometer
- Utility Lighting Package
- Heat and Sound Insulation
- Halogen Headlights
- Aluminum Body
- Tonneau Cover (4-Passenger Models)
- 124-Amp Alternator
- Vertical Rear Doors (4-Door Wagon Model)
- Serpentine Drive Belt
- Flow-Through Ventilation
- Full-Time 4WD System
- Power Steering
- High-Back Bucket Seats
- 3-Point Seat Belts
- Padded Interior
- Power Door Locks (Including Wagon Rear Door)
- AM/FM Stereo w/Cassette
- Glove Box
- Geared Hubs
- EZ-Kool® Glass
- Driver and Front Passenger Seat Armrest
- Sliding Rear Window (2-Door and 4-Door Hard Top Models)
- Power Windows
- Air Conditioning with Auxiliary Rear Unit
- TorqTrac 4 (TT4)
- 16.5" 2-Piece Steel Wheels w/Dual Beadlock
- Goodyear MT Tires

// OPTIONAL EQUIPMENT

- Central Tire Inflation System
- Trailer Towing System
- Driveline Protection
- Runflat Tire System
- Black Vinyl Seats
- Power Mirrors
- Remote Keyless Entry
- Rocker Panel Protection
- Heated Windshield
- Deluxe Rearview Mirror
- Rear Window Defroster (Not Available on 4-Door Open Top or Wagon Models)
- Monsoon™ Premium Audio System w/CD Player/Changer, Weatherband, and Rear Seat Audio
- Brush Guard
- 12,000-lb. Winch
- Body-Colored Wheels
- 10,800-lb. GVW for Fleet Use Only
- 16.5" 1-Piece Aluminum Wheels w/Integrated Beadlock
- 17" 2-Piece Aluminum Wheels w/Dual Beadlock and Runflat
- Goodyear G5-A Tires
- Goodyear MT/R Tires

// SPECIFICATIONS AND PERFORMANCE DATA

	2-Door Hard Top		4-Door Hard Top		4-Door Open Top		4-Door Wagon		4-Door* Slant Back	
	Standard	Metric	Standard	Metric	Standard	Metric	Standard	Metric	Standard	Metric
Curb Weight (Note 1):										
10,300-/10,800-lb. GVWR	6,564 lbs.	2,977 kg	6,964 lbs.	3,159 kg	6,814 lbs.	3,091 kg	7,154 lbs.	3,245 kg	7,090 lbs.	3,216 kg
Payload (Notes 1 & 2):										
10,300-lb. GVWR	3,736 lbs.	1,695 kg	3,336 lbs.	1,513 kg	3,486 lbs.	1,581 kg	3,146 lbs.	1,427 kg	3,210 lbs.	1,456 kg
10,800-lb. GVWR	4,300 lbs.	1,950 kg	3,900 lbs.	1,769 kg	NA	NA	3,710 lbs.	1,683 kg	NA	NA
Gross Axle Weight Rating:										
Front: 10,300-/10,800-lb. GVWR	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg	4,100 lbs.	1,860 kg
Rear: 10,300-/10,800-lb. GVWR	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg	6,800 lbs.	3,084 kg
Maximum Towed Load (Note 3):										
10,300-/10,800-lb. GVWR	8,236 lbs.	3,736 kg	7,836 lbs.	3,554 kg	7,986 lbs.	3,622 kg	7,646 lbs.	3,468 kg	7,710 lbs.	3,497 kg
Length (Note 1):	184.5 in.	4,686 mm	184.5 in.	4,686 mm	184.5 in.	4,686 mm	184.5 in.	4,686 mm	184.5 in.	4,686 mm
Maximum Height:	75 in.	1,905 mm	75 in.	1,905 mm	77 in.	1,956 mm	75 in.	1,905 mm	75 in.	1,905 mm
Width (Without Mirror):	86.5 in.	2,197 mm	86.5 in.	2,197 mm	86.5 in.	2,197 mm	86.5 in.	2,197 mm	86.5 in.	2,197 mm
Wheelbase:	130 in.	3,302 mm	130 in.	3,302 mm	130 in.	3,302 mm	130 in.	3,302 mm	130 in.	3,302 mm
Ground Clearance:	16 in.	406 mm	16 in.	406 mm	16 in.	406 mm	16 in.	406 mm	16 in.	406 mm
Track Width:	71.6 in.	1,819 mm	71.6 in.	1,819 mm	71.6 in.	1,819 mm	71.6 in.	1,819 mm	71.6 in.	1,819 mm
Grade Capability:	60%	60%	60%	60%	60%	60%	60%	60%	60%	60%
Side-Slope Capability:	40%	40%	40%	40%	40%	40%	40%	40%	40%	40%
Approach Angle Without Winch:	72°	72°	72°	72°	72°	72°	72°	72°	72°	72°
Approach Angle With Winch:	47°	47°	47°	47°	47°	47°	47°	47°	47°	47°
Departure Angle:	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°	37.5°
Runflat Capability (Note 4):										
(At 30 mph)	20 miles	32.2 km	20 miles	32.2 km	20 miles	32.2 km	20 miles	32.2 km	20 miles	32.2 km
Turning Radius:	26.5 ft.	8.1 m	26.5 ft.	8.1 m	26.5 ft.	8.1 m	26.5 ft.	8.1 m	26.5 ft.	8.1 m

* Available 1st Quarter, 2000

// COMPONENTS AND FEATURES

Turbo Diesel Engine :

Type : V8, 6.5L Diesel Turbocharged, Electronically Controlled
Horsepower : (@ 3,400 rpm): 195 hp (145 kW)
Torque : (@ 1,800 rpm): 430 lb.-ft. (583 Nm)
Governor Type : Electronic
Displacement : 396 cu. in. (6.5L)
Bore and Stroke : 4.06 x 3.82 in. (10.3 x 9.7 cm)
Compression Ratio : 20.2:1
Maximum Speed : 83 mph (134 kph)
Typical Accel. : (0 to 60 mph) 18.0 sec.
Fording Depth : 30 in. (76.2 cm)
Fuel Capacity : 25 gal. (95L). Plus 17 gal. (64L) res.

Transmission : 4L80-E 4-speed automatic

Gear Ratios : 1st - 2.48:1, 2nd - 1.48:1, 3rd - 1.00:1, 4th - 0.75:1, Reverse - 2.08:1, Torque Converter Ratio - 2.2:1
Transfer Case : New Venture Gear Model 242
Gear Ratios : Low 2.72:1, High 1:1
Axles : Hypoid with a ratio of 2.56:1. Continuous torque rating is 1,424 lb.-ft.
Geared Hubs : Gear Ratio - 1.92:1
Frame : Steel Box section with five cross members
Electrical : 12-Volt 124-Amp Alternator
Steering : Power assisted with a variable ratio of 13/16:1

Differential : Zexel Torsen® II torque biasing differential

Brakes : Hydraulic actuated, 4-wheel inboard mounted Meritor-WABCO ABS power disc brakes with translucent reservoir and level sensor. Rotors are 10.5 in. (266 mm) in diameter with an effective area of 17.4 sq. in. (112 sq. cm) each. Parking brake manually activates rear service brakes.
Suspension : Independent double A-frame with open-end coil springs and hydraulic shock absorbers
Tires : 37 x 12.50R-16.5 LT load range "D" Goodyear Wrangler MT radial

// STANDARD EQUIPMENT

- 4-Speed Automatic Transmission
- 4-Wheel ABS Power Disc Brakes
- Translucent Brake Fluid Reservoir with Level Sensor
- Tire Beadlock System
- Auxiliary Fuel Tank
- Tachometer
- Utility Lighting Package
- Heat and Sound Insulation
- Halogen Headlights
- Aluminum Body
- 124-Amp Alternator
- Tonneau Cover (4-Door Models)
- Vertical Rear Doors (4-Door Wagon Model)
- Serpentine Drive Belt
- Flow-Through Ventilation
- Full-Time 4WD System
- Power Steering
- High-Back Bucket Seats
- 3-Point Seat Belts
- Padded Interior
- Power Door Locks (Including Wagon Rear Door)
- AM/FM Stereo w/Cassette
- Glove Box
- Geared Hubs
- EZ-Kool® Glass
- Driver and Front Passenger Seat Armrest
- Sliding Rear Window (2-Door and 4-Door Hard Top Models)
- Power Windows
- Air Conditioning with Auxiliary Rear Unit
- TorqTrac 4 (TT4)
- 16.5" 2-Piece Steel Wheels w/Dual Beadlock
- Goodyear MT Tires

// OPTIONAL EQUIPMENT

- Central Tire Inflation System
- Trailer Towing System
- Driveline Protection
- Runflat Tire System
- Black Vinyl Seats
- Power Mirrors
- Remote Keyless Entry
- Rocker Panel Protection
- Heated Windshield
- Deluxe Rearview Mirror
- Rear Window Defroster (Not Available on 4-Door Open Top or Wagon Models)
- Brush Guard
- 12,000-lb. Winch
- Monsoon™ Premium Audio System w/CD Player/Changer, Weatherband and Rear Seat Audio
- Body-Colored Wheels
- 10,800-lb. GVW for Fleet Use Only
- 16.5" 1-Piece Aluminum Wheels w/Integrated Beadlock
- 17" 2-Piece Aluminum Wheels w/Dual Beadlock and Runflat
- Goodyear GS-A Tires
- Goodyear MT/R Tires

Notes: 1) The data on this page applies to models without winch and optional accessories. Models with winch are equipped as follows: Payload: increase by 137 lbs. (62 kg); Curb Weight: increase by 137 lbs. (62 kg); Length: increase by 6 in. (152.4 mm). 2) Payload includes passengers, optional equipment and trailer tongue weight. 3) Gross Combination Weight (GCW) of vehicle and trailer cannot exceed 14,000 lbs. (6,350 kg) for highway use only. A weight-carrying hitch gives your vehicle the capability to tow a maximum weight of up to 5,000 lbs. (2,268 kg). A weight-distributing hitch with spring bars gives your vehicle the capability to tow a maximum weight of up to 8,000 lbs. (3,630 kg). These are not necessarily weights the vehicle will tow at sustained highway speeds or varying altitudes. NOTE: The maximum allowable weight your vehicle can tow depends on many factors, including vehicle weight, load capacity, distribution, and hitch type. 4) Optional, for emergency use only, a "get home" capability that will cause tire damage. Consult your local Hummer dealer for availability of accessories and current specifications. All specifications are based on latest information available at time of printing. Pictured vehicles may vary from actual production models. Manufacturer reserves the right to change prices, colors, materials, equipment and specifications at any time and without prior notice. Details and specifications may vary according to local regulations and conditions. Some models may not be available at all times in all markets. See your North American dealer for 3-year/50,000-mile warranty details. Copyright © 1999, Hummer Corp. 1999, HUMMER, "HUMVEE", "TorqTrac 4" (TT4/ABS), Hummer logo are registered trademarks of AM General Corporation.