

# SUZUKI

The New Fun-Size Performers



## samurai

SPECIAL EDITION 4x4

SUZUKI samurai




S P E C I A L E D I T I O N



# Suzuki Celebrates 16 Years of 4×4s With The Sporty and Classy Special Edition



## Sixteen Points of Appeal

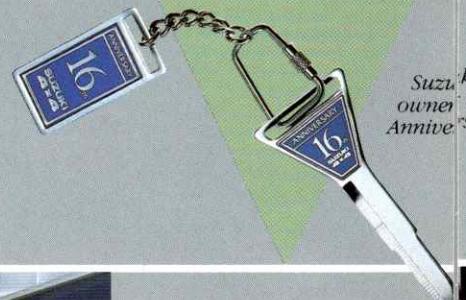


Suzuki is also presenting each owner with a special 16th anniversary key blank.

Suzuki is celebrating the 16th anniversary of 4×4 production, and we're doing it big – by introducing the limited Samurai Special Edition with a sporty exterior and classy interior. Color coordinated in dark blue and silver both inside and out, this New Fun-Size Performer also features large body stripes and the open-air freedom of a sunroof – all as standard equipment. In fact, because this is the 16th year, the Samurai Special Edition sports 16 exclusive new features. Each one earning it the title "Special."



4x4=16 Years

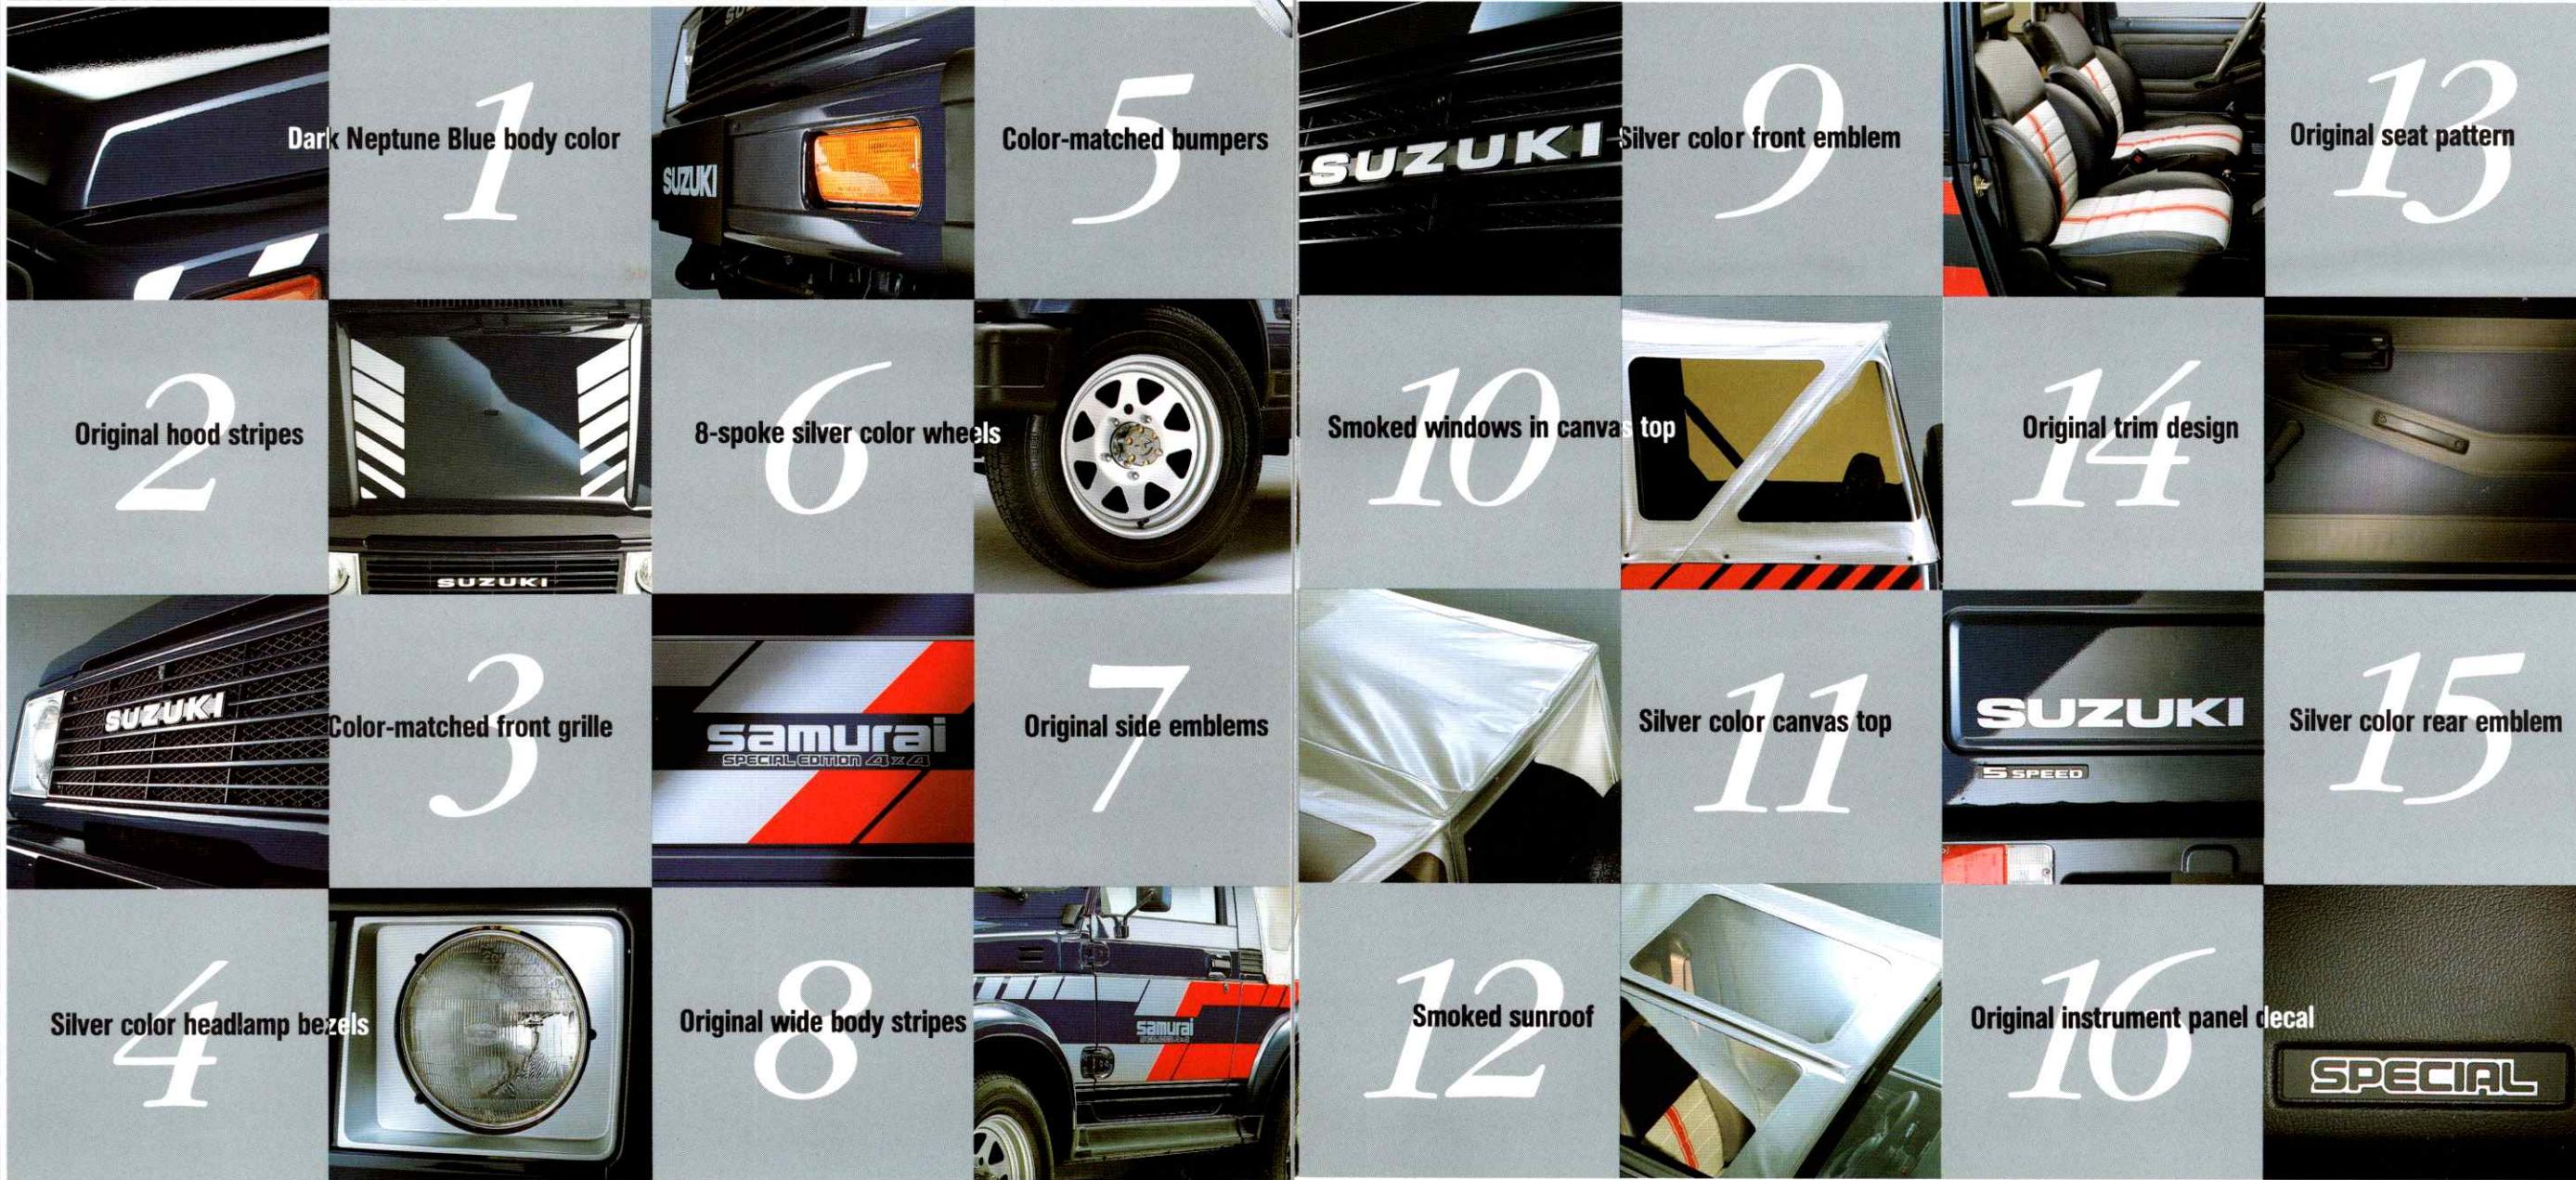

## ■ SPECIFICATIONS

### DIMENSIONS

Overall length	mm (in)	3,430 (135.0)
Overall width	mm (in)	1,530 (60.2)
Overall height	mm (in)	1,665 (65.6)
Wheelbase	mm (in)	2,030 (79.9)
Tread	Front	mm (in) 1,300 (51.2)
	Rear	mm (in) 1,310 (51.6)
Load deck with rear seats folded	length	mm (in) 650 (25.6)
	width	mm (in) 1,270 (50.0)
forward	height	mm (in) 1,020 (40.2)
Ground clearance	mm (in)	205 (8.1)

### WEIGHT

Curb weight	kg (lbs)	950 (2,094)
Gross vehicle weight rating	kg (lbs)	1,330 (2,932)
Gross axle weight rating	front	kg (lbs) 570 (1,257)
	rear	kg (lbs) 760 (1,576)
Seating capacity		4

### ENGINE

Type	Four-stroke cycle, Water cooled, OHC
Number of cylinders	4
Piston displacement	cc (cu.in) 1,324 (80.8)
Bore	mm (in) 74.0 (2.91)
Stroke	mm (in) 77.0 (3.03)
Compression ratio	8.9:1
Maximum Output	64 hp at 5,500 rpm
Maximum Torque	74 lb.ft. at 3,500 rpm

### TRANSMISSION

Clutch Type	Dry, Single disc
Transmission type	5-forward all synchromesh, 1-reverse
	1st 3.652
	2nd 1.947
Gear ratio	3rd 1.423
	4th 1.000
	5th 0.795
	Reverse 3.466
Transfer gear box type	2 speed constant mesh
Transfer gear ratio	High 1.409
	Low 2.268

### SUSPENSION

Front & Rear	Leaf spring with double action damper
Tire size, front & rear	P205/70R15

### STEERING


Steering gear box	Ball nut
Minimum turning radius	m (ft) 5.1 (16.7)

### BRAKES

Front	Power assisted disc (floating caliper type)
Rear	Power assisted drum (leading and trailing)
Parking Brake	Mechanical actuated on rear two wheels

### CAPACITIES

Fuel tank	40 ltr. (10.6 U.S. gal, 8.8 Imp. gal)
-----------	---------------------------------------

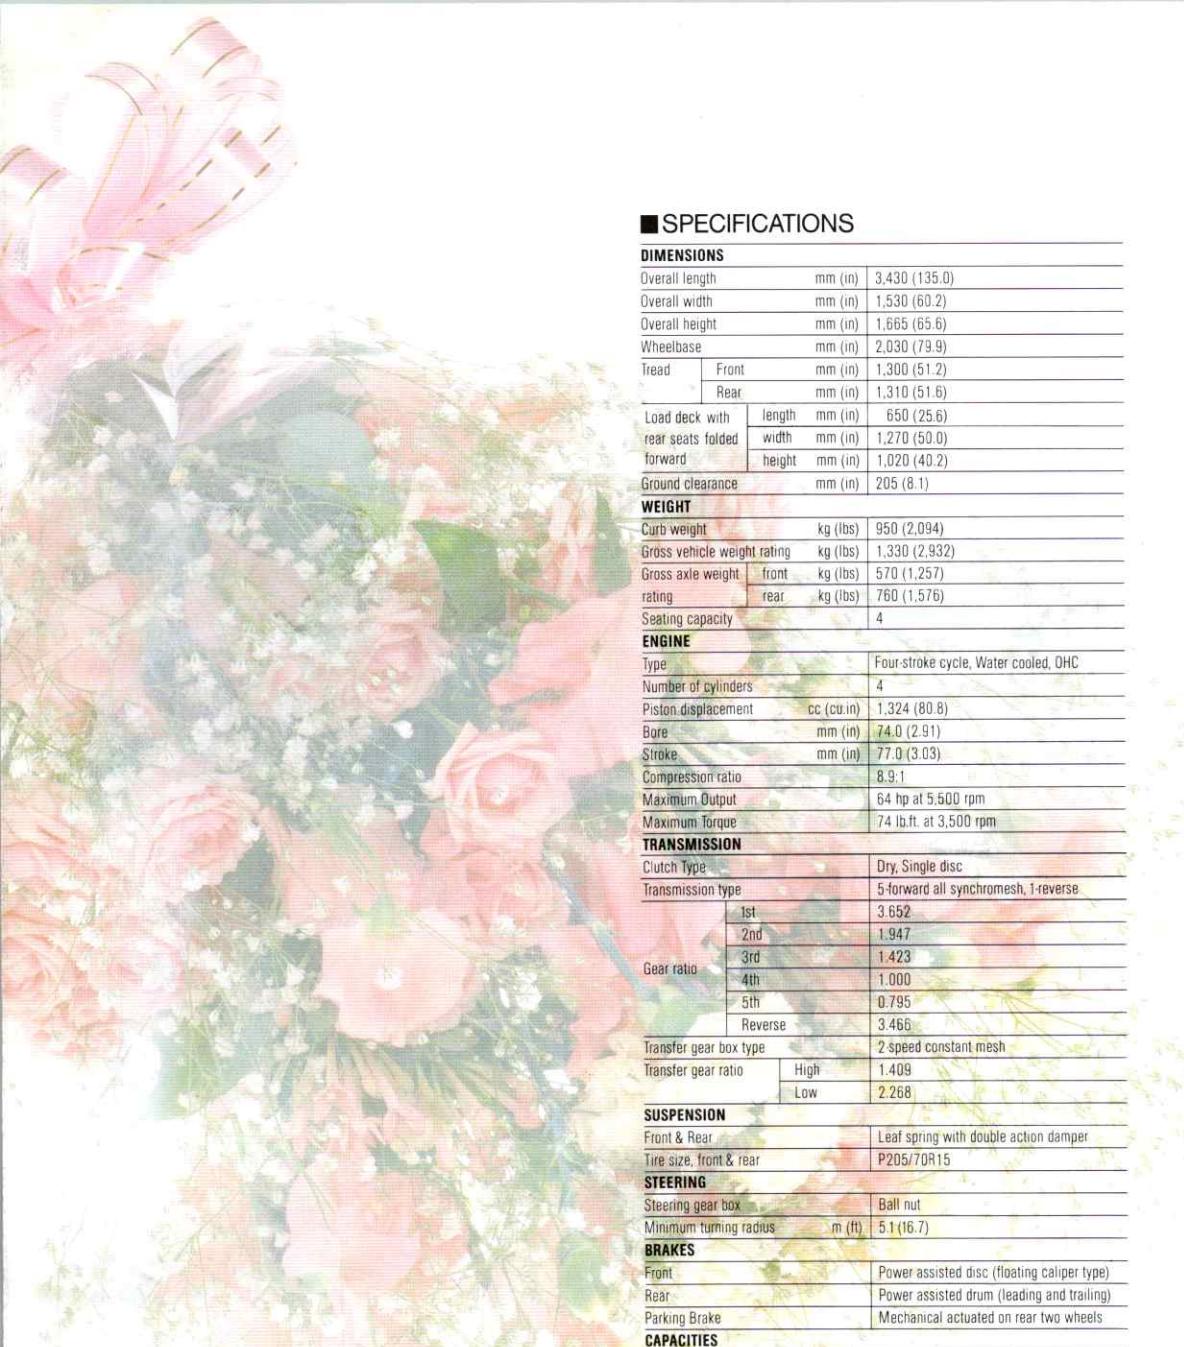

**SUZUKI MOTOR CO., LTD.**

300 Takatsuka, Hamamatsu, Japan

Standard and optional equipment available may vary for individual markets. Please enquire at your dealers, as specifications and illustrations may refer to models not available in your region. Specifications in non-metric units are approximate. Suzuki Motor Co., Ltd. reserves the right to change, without notice, prices, colors, materials, equipment, specifications and models, and also to discontinue models.